Blaze Light Box 1008 - Freestanding

Blaze Freestanding Light Box 1008 is 10'w by 8'h, is double sided and features a durable 6" aluminum frame in your choice of Silver, White or Black. Perimeter, interior LED light bars are pre-attached to the frame and make the box GLOW. The light bars include an internal power supply, which means no separate power supplies within the frame, minimizing shadowing and cord management.

Two backlit graphic material options are available to choose from, Backlit Textile (dye-sublimation printed) and Intensity (UV/LED printed).

Backlit Textile is an 8 oz. tightly woven fabric that is slightly stretchy, foldable and washable; it is best for multiple uses. Intensity is a 6.5 oz. material that has a smooth, coated finish. The UV printing process allows Intensity to be double struck with ink creating vibrant backlit graphics.



We are continually improving and modifying our product range and reserve the right to vary the specifi cations without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

features and benefits:

- 10'W x 8'H
- 6" light boxes feature a sleek, aluminum frame, available in white, black or silver
- Perimeter LED light bars are pre-attached to the frame
- Light bars feature an internal power supply, which means no separate power supplies within the frame
- Easy to assemble
- UL Certified & ADA compliant feet, 3/16"h, approved for public spaces
- 5 year LED warranty on lights; long life span - 43,800 hours for 5 years if powered 24/7
- Lifetime warranty on frame
- Comes in heavy duty box; hard-shell case is optional

dimensions:

Hardware

Assembled unit:

120"w x 96"h x 21.65"d
3048mm(w) x 2438.4mm(h) x 549.91mm(d)

Approximate Weight:
88 lbs / 39.91kg

Graphics

Graphic material: Backlit Textile (dye-sublimated fabric) or Intensity (UV printed)

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

https://www.theexhibitorshandbook.com/downloads/download-graphic-templates
or click here

Shipping

Packing - 4 Boxes:
Shipping dimensions:
2 x BOXES (55"L x 9"H x 11"D) 1397mm(l) x 228.6mm(h) x 279.4mm(d)
1 x BOX (79"L x 9"H x 11"D) 2006.6mm(l) x 228.6mm(h) x 279.4mm(d)
1 x BOX (18"L x 12"H x 4"D)
457.2mm(l) x 304.8mm(h) x 101.6mm(d)
Approximate shipping weight:
172 lbs / 78.0179 kg

Optional OCE2 Case
Shipping dimensions:
1 x BOX - 17"L x 63"H x 17"D
431.8mm(l) x 1600.2mm(h) x 431.8mm(d)
Approximate shipping weight:
126 lbs / 57.15 kg

additional information:

Powder coat color options:



Tools Required





MULTI HEX KEY
(INCLUDED)

How to Apply & Remove Graphics

Installation and removal of SEG graphics is easy!


Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

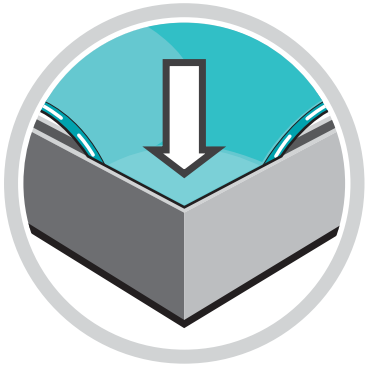


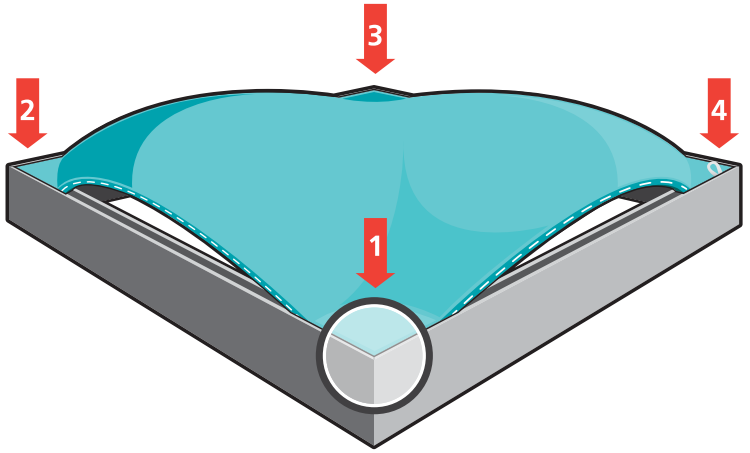


Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.

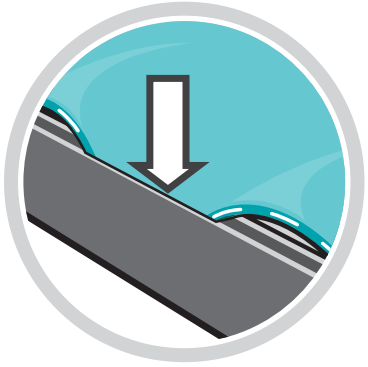

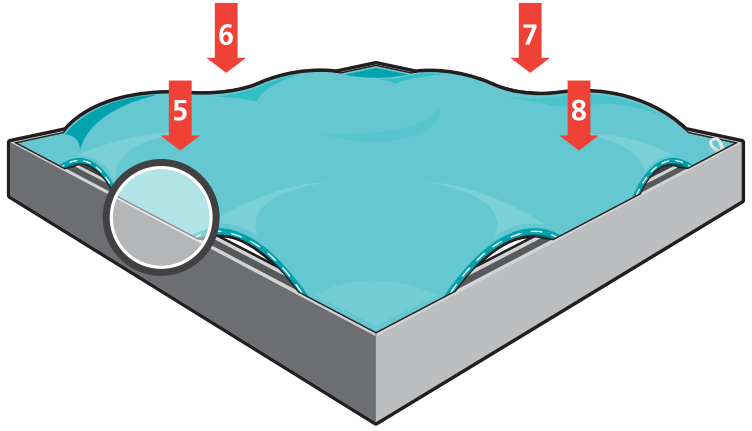

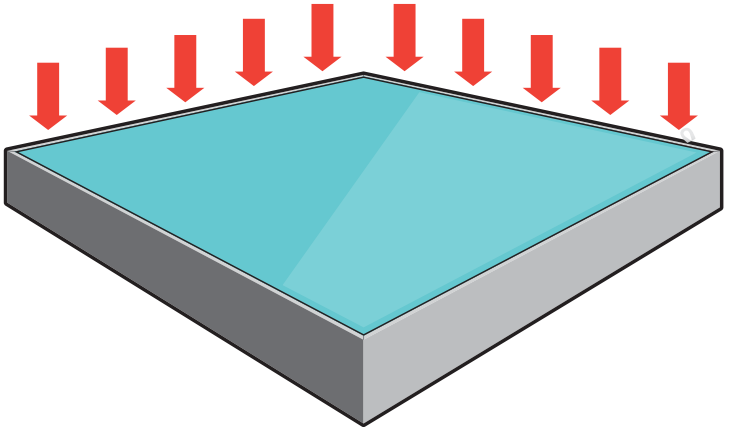


Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.


LED Lights

NOTE: A maximum of 20 LED fixtures can be connected in a line.

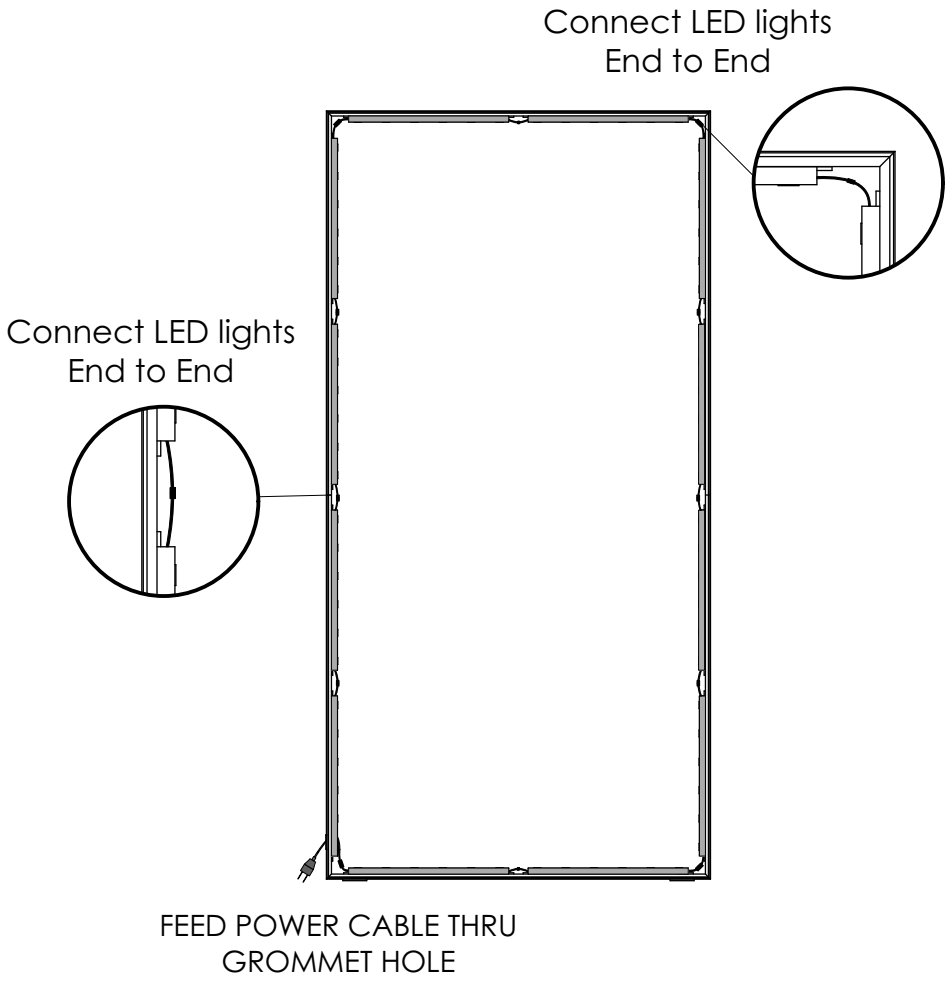


QTY	IMAGE	DESCRIPTION
8		CB10 90 DEGREE CONNECTOR
9		JOINER BAR (OLD STYLE)
1		1524MM (60.00in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END- 171MM FROM LEFT/BOTTOM END-WITH 9MM DIA THRU HOLES 90MM FROM LEFT END
4		1219MM (47.99in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END
2		1524MM (60.00in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END
2		Blaze foot with double countersunk holes, 3in x 550mm length
1		1524MM (60.00in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END-WITH 9MM DIA THRU HOLES 90MM FROM LEFT END
1		8FT POWER CORD FOR LED-EV LIGHTS
2		1203MM LENGTH OF PH EXTRUSION-WITH IB2 LOCK HOLES ONE SIDE-CAM LOCK ONE SIDE
16		19" LED AC LIGHT BAR 6000 K
4		10" LED AC LIGHT BAR 6000 K


SETUP INSTRUCTIONS

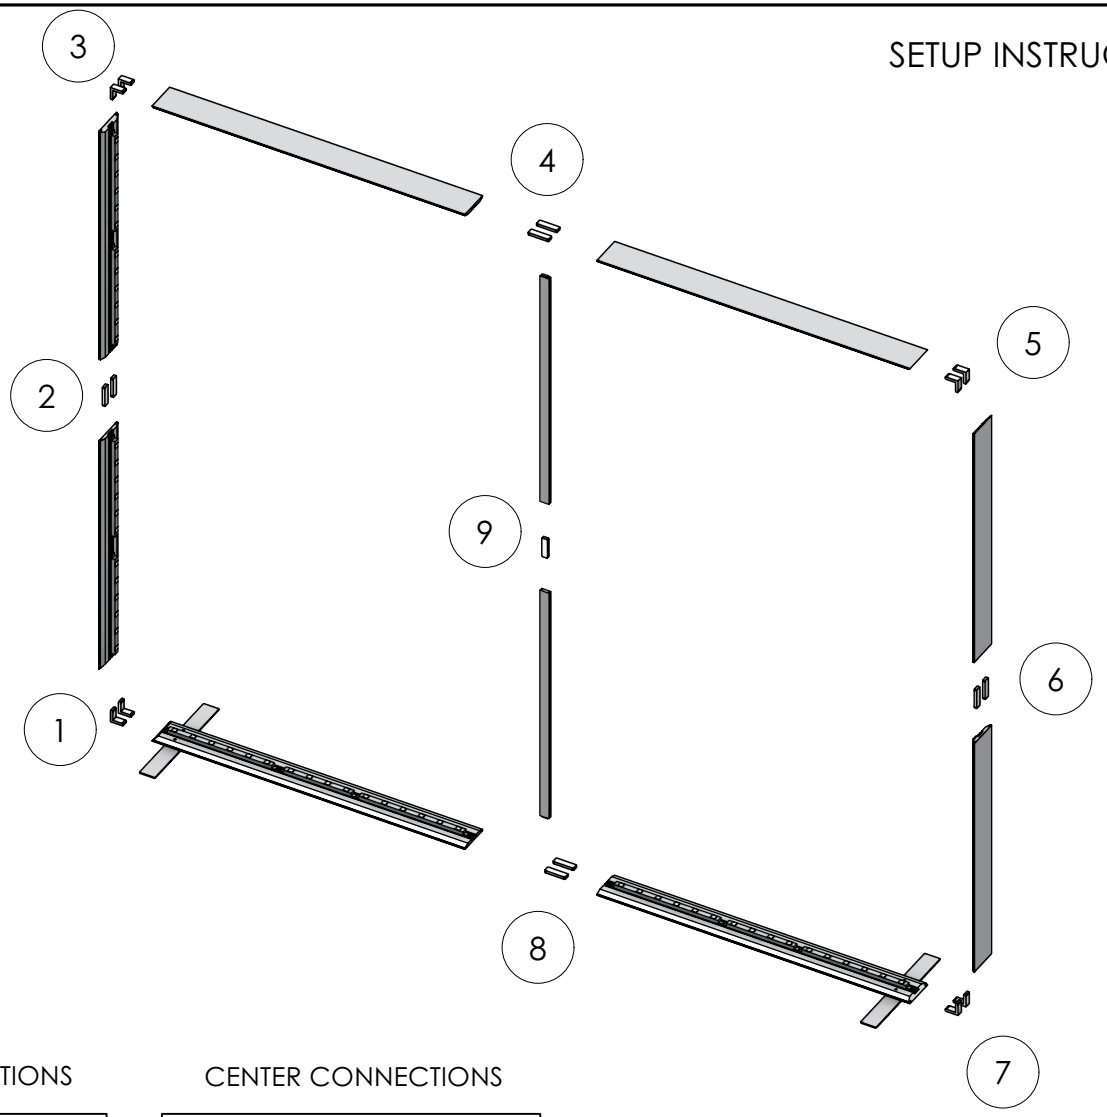


ATTACH SUPPORT PLATES

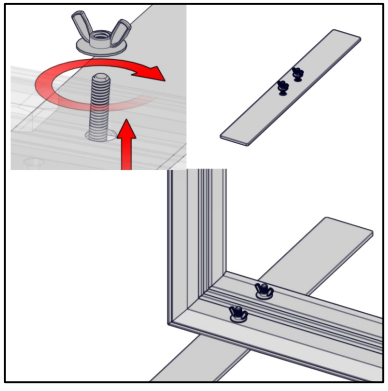

CORNER CONNECTIONS

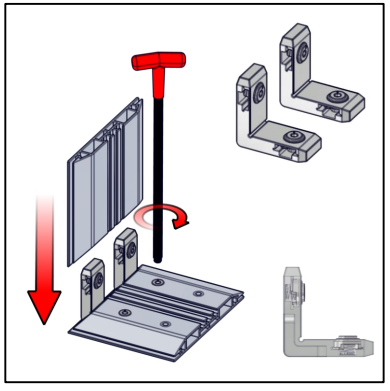


CENTER CONNECTIONS

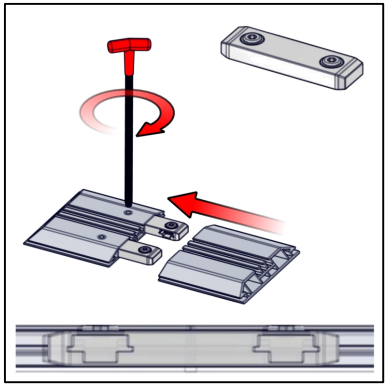


ASSEMBLE FRAME

QTY	IMAGE	DESCRIPTION
1		GRAPHIC (A1) (123.88 w X 99.88 h total size) 119.88 w X 95.88 h finish size, UV/LED print on Backlit Intensity, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner
1		GRAPHIC (A2) (123.88 w X 99.88 h total size) 119.88 w X 95.88 h finish size, UV/LED print on Backlit Intensity, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner

SETUP INSTRUCTIONS

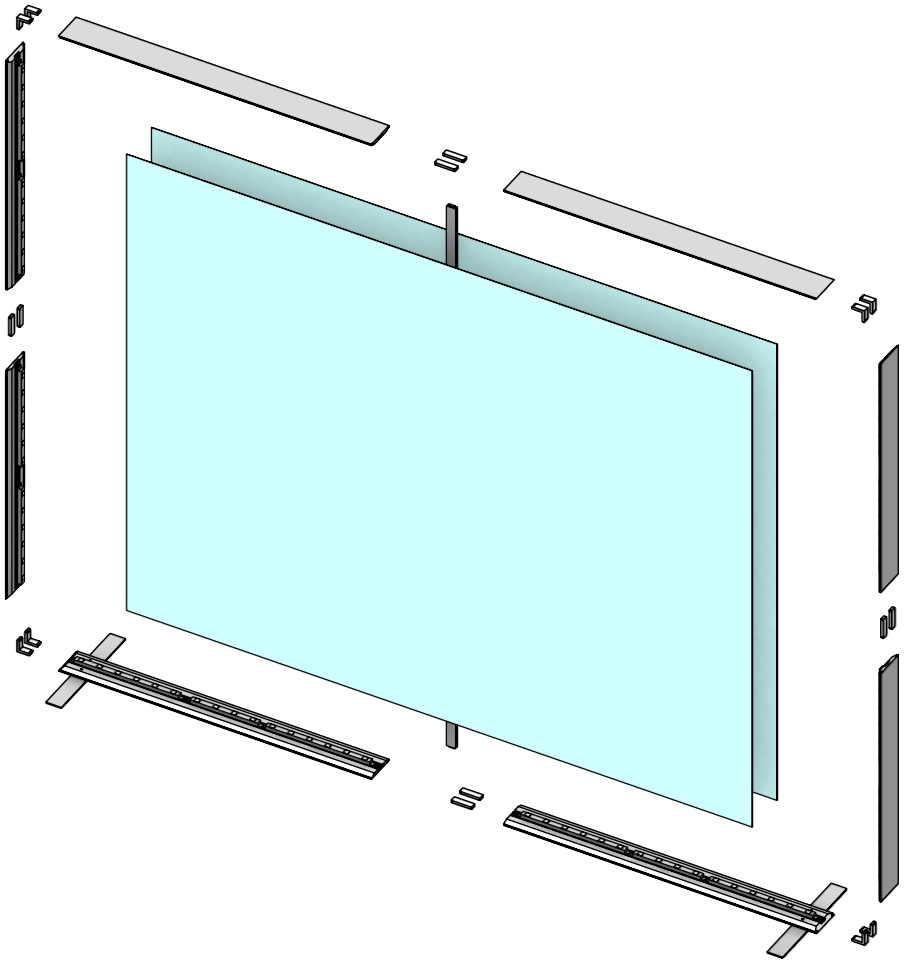


PRESS CORNERS IN

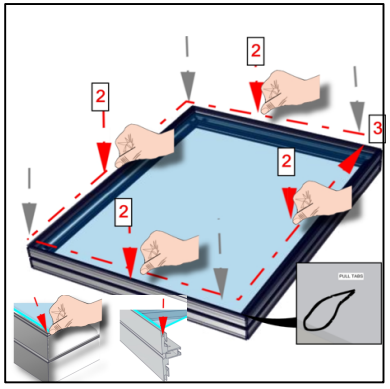

THEN PRESS ALONG THE PERIMETER EDGE


ADD GRAPHICS

LED Lights How to replace an LED light fixture.

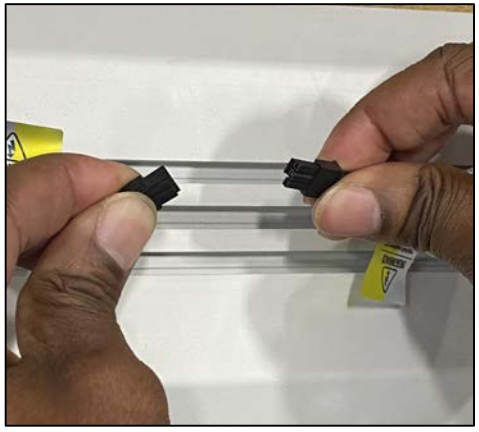


STEP-1

Disconnect the lead at both ends of the LED fixture as shown. Take note of male and female ends.

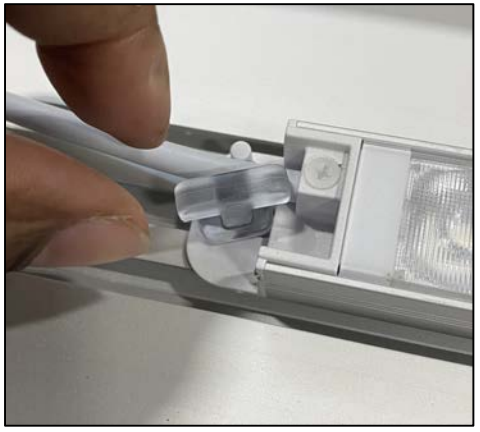

STEP-2

Rotate the twist clips 90 degrees at both ends to unlock and remove the fixture from the extrusion.

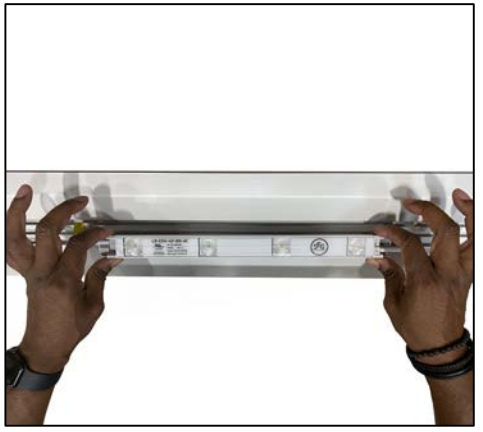

STEP-3

Remove and replace the LED light. Be sure to match the proper male and female connectors to existing LED lights.



STEP-4

Secure the replacement LED light with twist clips on both ends.



STEP-5

Connect replacement LED light with existing lights.